

The Pure Essence of Beauty

Multifunction toilet seat

New **CHEERS**

"New CHEERS" can be easily installed.
It will brighten up your lifestyle.



Posterior washing



Easy to operate: just turn the control dial to adjust the water pressure.

Bidet washing



Slide and turn the control dial for the most personalized location and pressure.



Variable angle control



You can control the spray angle simply by sliding the control dial back and forth.



Massage washing

Angle spray



The spray washes from a 62° angle. This will prevent waste water from soiling the nozzle.

Detachable nozzle



The nozzle is detachable for easy cleaning.

Gentle Closing Seat & Lid



The toilet seat and lid are engineered to close gently.

Antimicrobial resin applied



"Antimicrobial" resin is applied to assure germ resistance and easy cleaning.

Heated seat and water



The seat & water temperature can be adjusted for your personal comfort. (Option for NC-300W-AS & NC-300W-TW)

Power saving function



Press the "seat temperature" and "water temperature" simultaneously, to turn on the "Power saving function" (Option for NC-300W-AS & NC-300W-TW)

Easy to Clean Superb Hygiene



Easy to release



Light weight



Easy cleaning




Detachable lid to facilitate easy cleaning




Easy Installation


*Requirement for installation

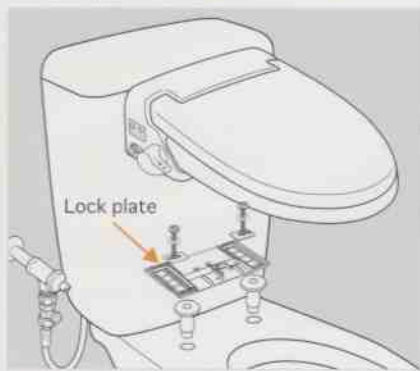


Top side installation kits

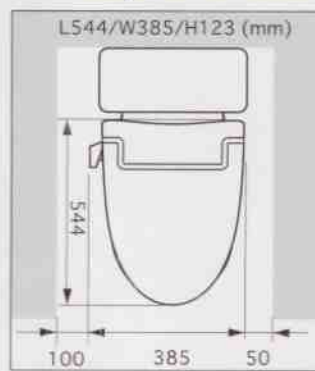

Compact size

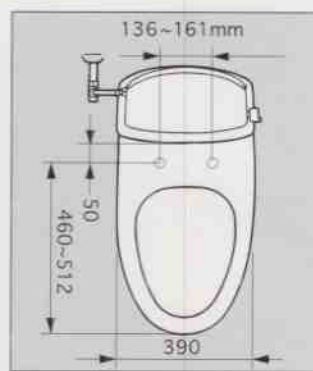

Adjustable bolt pitch

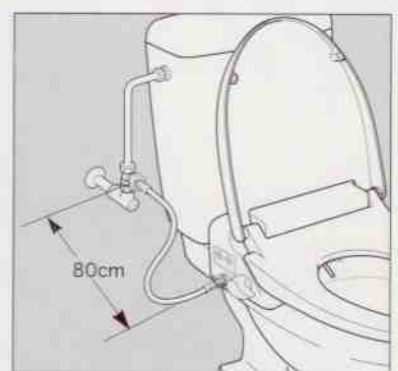

Distance to junction valve

Product specifications

Model	NC-300W-AS	NC-300W-TW	NC-100W-AS	
Water supply method	Direct connection to tap water	Direct connection to tap water	Direct connection to tap water	
Applicable water pressure	0.06 - 0.74 Mpa. (0.6 - 7.5 kgf/cm ²)	0.06 - 0.74 Mpa. (0.6 - 7.5 kgf/cm ²)	0.06 - 0.74 Mpa. (0.6 - 7.5 kgf/cm ²)	
Maximum rating	220 Vac/280W/50Hz	110 Vac/355W/60Hz	-	
Product dimensions (Width: dial excluded)	L: 544 x W: 385 x H: 123 mm (L: 21.4 x W: 15.2 x H: 4.8 in.)	L: 544 x W: 385 x H: 123 mm (L: 21.4 x W: 15.2 x H: 4.8 in.)	L: 544 x W: 385 x H: 123 mm (L: 21.4 x W: 15.2 x H: 4.8 in.)	
Product weight	3.6 kg (7.9 lb)	3.4 kg (7.5 lb)	2.8 kg (6.2 lb)	
Installation bolt pitch	136 - 161 mm (5.4 - 6.3 in.)	136 - 161 mm (5.4 - 6.3 in.)	136 - 161 mm (5.4 - 6.3 in.)	
Toilet Seat Cleaner & Bidet Cleaning	Heated water tank capacity	0.9 L (0.95 qt)	0.9 L (0.95 qt)	
	Nozzle Extrusion	By water pressure	By water pressure	
	Posterior spraying volume	0 - 0.9L/min (0 - 0.95qt/min)	0 - 0.9L/min (0 - 0.95qt/min)	
	Bidet spraying volume	0 - 0.9L/min (0 - 0.95qt/min)	0 - 0.9L/min (0 - 0.95qt/min)	
	Water heater capacity	230W	300W	
	Water temperature control	OFF: Normal water temp., LOW: 37.5°C (99.5°F), HIGH: 39.5°C (103.1°F)	OFF: Normal water temp., LOW: 37.5°C (99.5°F), HIGH: 39.5°C (103.1°F)	-
Safety devices	Thermal fuse and temperature sensor switch	Thermal fuse and temperature sensor switch	-	
Toilet Seat	Heater capacity	45W	54W	
	Surface temperature adjustment	OFF: Room temp., LOW: 36.5°C (97.7°F), HIGH: 42.5°C (108.5°F), Ambient: 20°C (68°F)	OFF: Room temp., LOW: 36.5°C (97.7°F), HIGH: 42.5°C (108.5°F), Ambient: 20°C (68°F)	-
	Safety devices	Primary: Thermostat, Secondary: Thermal fuse	Primary: Thermostat, Secondary: Thermal fuse	-
Power saving function	Automatic reset after 8 hours of interval	Automatic reset after 8 hours of interval	-	
Length of power cord	1M (3.3 ft.)	1M (3.3 ft.)	-	

※The specification and exterior appearance maybe modified without notice. ※ The color of the actual product may differ from the printing on this catalogue.

Ideal Merchandise Pte Ltd
Blk 809 French Road, #02-198
Kitchener Complex, Singapore 200809
T + 65 62979829 F + 65 62979819